

## Description & Features

### Specifications


Model No.:	HB-EVO-UFO-120W	
Power Consumption:	120W	120W
Input Voltage:	100-277Vac	
Cover	Glass	PC
Lumens Output:	15600lm	
LED Brand:	Philips	
Color Temperature:	2700K, 4000K, 5000K, 5700K	
CRI:	>80	
Beam Angle:	120° Type( 15° , 30° , 90° ,150° lens optional)	
IP Rated:	IP65	IP40
Power Factor:	>0.90	
Total Harmonic Distortion:	<20%	
Working Temp.:	-20°C ~ 50°C	
Storage Temp.:	-40°C ~ 70°C	
Lifespan L70(H):	>50,000 Hours	
Cable:	0.3m three-core high quality silicon wire	
Fixture Weight:	5.9kg	



### B1-Glass cover





Unit: mm



### B2-PC cover



Unit: mm

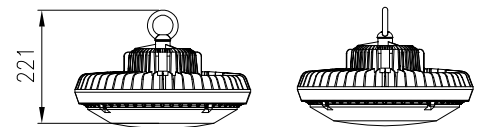


### Ordering Information

Sample: HB-120U-B1-40K-BK


Product	LED Chips	Cover	CCT	Housing color	Beam Angle	Operation
HB-EVO-UFO-120W	Philips SMD3030	B1	27K	BK	120° Alu reflector	1-10V dimming(Standard)
		Glass Cover	2700 kelvin	Black(Standard)	15°	NDIM
		B2	40K	SV	15° Lens	no dimming
		PC Cover	4000 Kelvin	Silver	30°	DALI
			50K		30° Lens	DALI dimming
			5000 Kelvin		60°	
			57K		60° Lens	
			5700 Kelvin		90°	
					90° Lens	
					150°	
					150° Lens	

## Light Distribution Curve

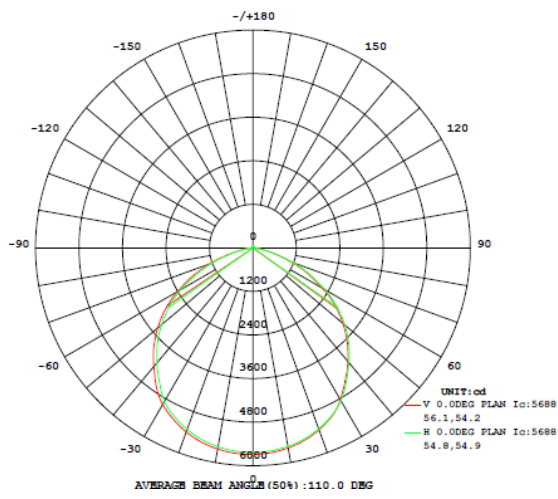


120° Type

## Illumination Distribution

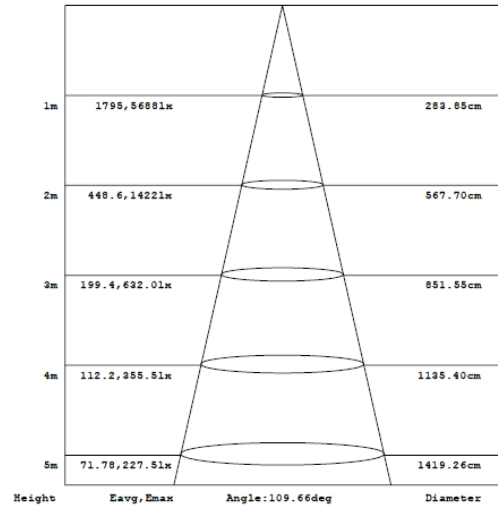


120° Type

## Installation Guide



The yellow and green line=GND  
 Brown line=L  
 Blue line=N

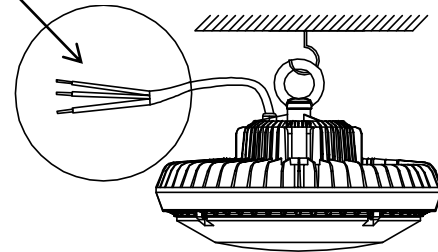

## Warranty Policy

- Standard 5 years after purchase under normal usage